



Timer 計時器

Application: Food Machinery, Shoe Machinery, High Temperature Furnace, Packing Machinery, Oven, Coating Machinery...Etc.
用途：食品機械、包裝機械、烤箱、高溫爐、塗裝機械、鞋業機械等的廣泛應用。




FEATURES

1. 4 digit LED display with readable decimal points.
2. Can be used as count up and count down timer.
3. Simple user interface design with direct navigation key setting.
4. Wide time range selectable in the following formats: 9999 (hour), 9999 (min), 9999 (sec), 99.59 (h.s), 99.59 (m.s.)
5. Time-start methods are available in the form of: power-on and signal-on methods through external contact.
6. Accessible time adjustments even during in the operation mode.
7. Selectable time-end mode: time hold, time reset and auto-run mode.
8. Interchangeable output contact: A contact, B contact.
9. Removing and mounting unit with ease without affecting its normal installation.

SPECIFICATION

Timing accuracy : $\pm 0.01\%$
Functional Mode : Timer
Contact Output : Relay 250V/5A
Input Power : AC 220V 50/60 Hz
Setting Mode : (Hour),(Min),(Sec),(Hour.Min),(Min.Sec)
Ordering Code : T483 (48mm*48mm only)
Ambient Temperature : $-10\sim 55^{\circ}\text{C}$, below 90% humidity

DIMENSION 尺寸圖

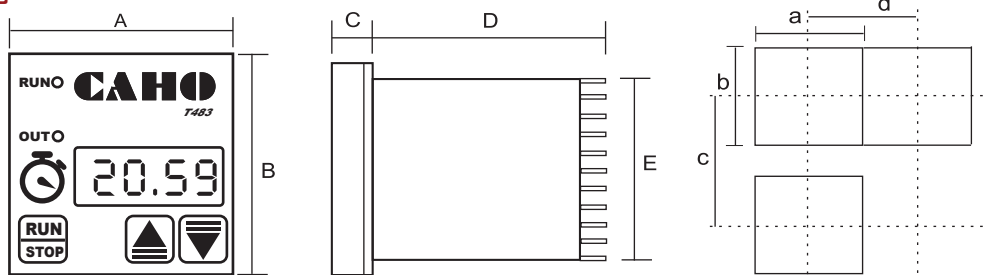

PANEL CUTOUT 開孔尺寸

(單位Unit:mm)

型號 Model	A	B	C	D	E	a	b	c	d
T483	48	48	8	92	45	45 ^{+0.5} ₋₀	45 ^{+0.5} ₋₀	75	60


開孔尺寸(Panel Cutout) 48x48 —開(Cut) 45 正方(mm)

ORDERING CODE 訂貨編號

型號 Model No.

T	4	8	3
---	---	---	---

WIRING DIAGRAM 接線圖

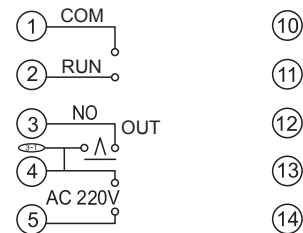

特性

1. 4位數LED顯示，包括小數點輔助判讀
2. 正數/倒數計時
3. 外觀簡明、上下鍵修改直接儲存設定
4. 計時模式提供5種時間單位選擇: 9999 (時)、9999 (分)、9999 (秒)、99.59 (時.分)、99.59 (分.秒)
5. 外部接點啟動，可設定立即啟動及待機啟動功能
6. 計時過程中可即時增加或減少時間
7. 計時結束動作選擇: 停止計時、延遲計時關閉、無限循環
8. 輸出接點可切換: A接點、B接點
9. 抽取式設計，簡易安裝，改善傳統計時器安裝不易問題

規格說明

時間精度 : $\pm 0.01\%$
功能種類 : 計時器
接點輸出 : Relay 250V/5A
入力電源 : AC 220V 50/60 Hz
設定模式 : (時)、(分)、(秒)、(時.分)、(分.秒)
訂貨型號 : T483 (48mm X 48mm 單一規格)
環境濕度 : 濕度低於90%，常溫介於零下10度至55度